

JENILE

# VIBRATING AND CONNECTED BABY MONITOR CAMERA BBC18

## User Guide



- Please read the following instructions and safety warnings before you install the Video Monitor.
- Please retain these instructions for future reference
- Tool needed: Screwdriver (not included) for mounting the camera on the wall if needed
- Additional camera(s) CBBC18 (sold separately).

## Important Safety Warnings

### WARNING!

Strangulation Hazard - Children have STRANGLED in cords.  
Keep this cord out of the reach of children  
(more than 3 feet (0.9 m) away).



#### To prevent cord entanglement and strangulations:

- Do not place the Camera or AC adaptor cord within reach of children.
- Do not place the Camera or AC adaptor cord in, or attach it to a crib.
- Never use extension cords with AC adaptors. Use only AC adaptors provided.

#### Important Safety Instructions:

- Adult assembly is required. Keep small parts away from child's reach.
- This product is not a toy. Do not allow children to play with it.
- This Video Monitor is not a substitute for responsible adult supervision.
- Test the Video Monitor and all its functions so that you are familiar with it prior to actual use.
- When the power adaptor is plugged into an electrical outlet, do not touch the exposed end.

#### Caution – risk of heat generation, fire or explosion.

- Li-ion battery is built into the product.
- Charge the product by the designated charging method.
- Do not place the product in or near fire, or put the product in a microwave.
- Do not expose the product to high temperatures above 140 F.
- Do not disassemble the product.
- Do not expose the product to excessive shock such as drooping from a high place.
- Keep the product dry.

Dispose of the product appropriately.

www.jenile.com

02

## 1. Using your Video Monitor

#### Vibration of the monitor

The monitor's vibration is automatic as soon as the baby cry sound indicator reaches the sufficient sound level (red LED).

#### For deaf and hard of hearing parents

It is possible to complete your product with compatible light flashes and vibrating products offered by Jenile® visit our site [www.jenile.com](http://www.jenile.com)

#### Connection to Jenile® flash and vibrating receivers

If you already have Jenile® receivers you can connect the vibrating camera. Simply activate the connection mode of your receiver (refer to the user manual of the product concerned) and trigger the vibration of the monitor by shouting in front of the microphone of the camera, the receiver will flash in blue, the secure connection will be then carried out.

#### Night Vision Mode

The Camera features 6 Infrared LEDs around the lens designed to capture clear images in dark environments or at night. When the Light Sensor detects low light levels, the Night Vision Mode will automatically activate and the video shown in the Monitor will display in black and white.

#### Charging the Battery

Your Video Monitor has an internal, replaceable, 2350mah lithium-ion rechargeable battery. Charge the battery by connecting the Monitor to a power outlet using the power cord provided.

#### Video ON/OFF

This feature allows you to turn the video screen OFF while maintaining the audio monitor ON. Simply press the Video ON/OFF key to turn the video screen ON or OFF.

#### IMPORTANT:

**When the Monitor is on power save mode, the Video Screen will automatically turn OFF after 30s, 60s, 90s depends on VOX setup. This sleep mode helps conserve battery power. To turn video back ON, simply press the Video ON/OFF button.**

www.jenile.com

03

## 2. Package included

	1 X camera
	1 X monitor with 2350mAh rechargeable Li-battery (PL754065,3.7V,2350mAh, 8.695WH)
	2 X switch power adaptors
	1 X user manual

www.jenile.com

04

## 3. Getting Started

### Camera

1. Connect Camera to AC outlet
2. Camera works automatically.
3. Disconnect the power from the camera, camera automatically switch off.

#### Camera paired (Default)

The baby camera is already paired by default, you do not need to pair the camera and screen unless you reset your camera.

To pair them, please access the "CAMERA" menu, then select the new camera and press the "Pair / Reset" button.

Shortcut: Long press the button on the screen and press the "Pair / Reset" button.

#### Power Indicator

Working- Green Light on;  
Pairing- Green light flash .


#### Recommendation

If your child is coughing, we recommend you to increase the seconds on


www.jenile.com

05

### Camera

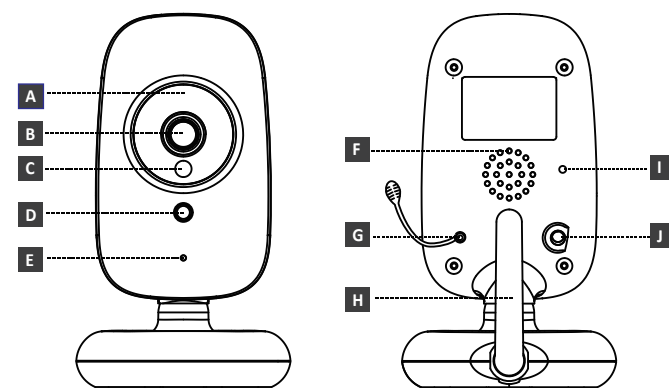


- A Infrared LED lights
- B Camera Lens
- C Light sensor
- D Power Indicator
- E Microphone
- F Speaker
- G Temperature sensor
- H Antenna
- I Pair/Reset
- J AC Adapter Jack
- K Wall Mount



www.jenile.com

06

### Monitor

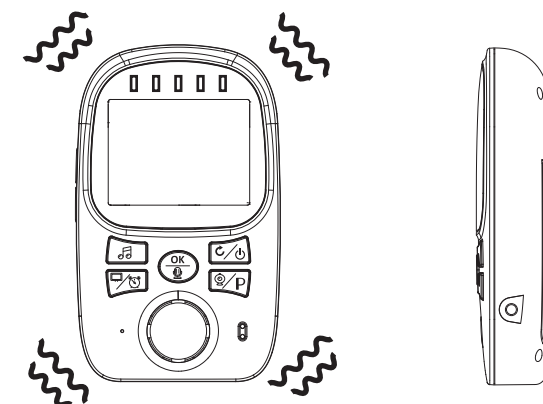


1. Connect Monitor to AC outlet.
2. Long press the 'Return/Power' key, the monitor turns to start to work.
3. The Monitor and Camera are turned on, video captured by the Baby unit will appear on the video screen.
4. While Pressing 'OK/Talk' key to have talk back to the camera, release 'OK/Talk' key to hear the baby voice.
6. **Power Indicator:**  
Charging - Red light on,  
Full- Green light on;  
Battery short capacity- Red light slow flash
7. **Signal Indicator:**  
Working- Green Light on;  
Out of range - Red light on;  
Pairing- Green light flash .

www.jenile.com

07

### Monitor

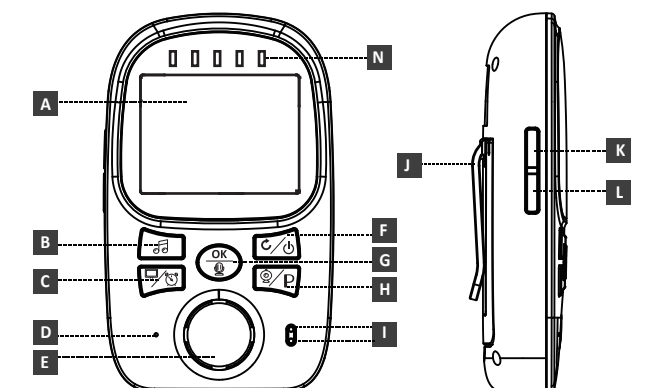

- A 2.4 Inch Full view LCD display
- B Microphone sensitivity
- C Video (ON/OFF)/Alarm key
- D Microphone
- E Speaker
- F Return/Power key
- G OK/Talk key
- H Camera/Pair key
- I Power Indicator/Signal Indicator
- J Belt Clip
- K Volume Up/Menu Navigation
- L Volume Down/Menu Navigation
- M AC Adapter Jack
- N Baby Cry Sound Indicator

www.jenile.com

08

## 4. Menu Options

### Monitor

1. Monitor showing opening image.
2. If the monitor does not pair, the monitor will enter into Pairing mode
3. Vibration Sensitivity  
Press to set the camera’s microphone sensitivity
4. Video (ON/OFF)/ Alarm  
Short press for opening the screen (Video ON/OFF)  
Hold the button to enter into Alarm setting
5. OK / Talk back  
In menu operation, short press refers to confirm options  
In Video mode : Hold on OK button to talk back through the camera
6. Return / Power  
In menu operation, Return icon refers to Return  
Hold the button to turn on/off the monitor
7. Camera / Pair  
In video mode, short press refers to camera switch  
Hold the button to pair an other camera.

Memo: Pairing with a new camera isn’t automatic. It must be done manually using the "Camera" Menu.

Ensure that the Monitor and Camera are away from obstacles that may interfere with the signal :

- some kind of vwalls, floors, ceilings can interfere with the signal according to their thickness or material,
- electronic devices like Wi-Fi routers, microwave ovens, cordless phones, Bluetooth devices, home computers, etc.

It is recommended to keep your Video Monitor away from these types of devices at least 5 feet. If the signal is weak, try moving the Monitor and/or Camera to different positions in the rooms.

#### Video on screen is in black and white

- The Camera is in a dark environment and Night Vision Mode has been activated.  
Ensure that the Camera is in a well-lit environment to de-activate Night Vision Mode.

#### Audio Feedback

- The units may be too close, move the Monitor further away from the Camera.
- Look for any noise source in baby’s room. Remove noise source or move Camera away from the source.

#### Monitor not responding (frozen or unresponsive)

- Switch off and on the monitor.

	<b>Brightness</b>	Press ‘UP/Down’ to adjust the brightness, press ‘OK’ button to confirm and get into last MENU. Press ‘RETURN’ button back to Last Menu without changes.
	<b>Vox</b>	Display time of the screen, four Options: 30S.60S.90S.NEVER. Press ‘UP/Down’ to choose the options, press ‘OK’ button to confirm and get into last MENU. Press ‘RETURN’ button back to Last Menu without changes.
	<b>Vibration Sensibility</b>	Three Options: 0,5 Seconds. 1,5 Seconds. 3 Seconds. Press ‘UP/Down’ to choose, press ‘OK’ to confirm and back to last Menu. Press ‘RETURN’ button back to last Menu without any changes.
	<b>Zoom</b>	Press ‘UP/Down’ to adjust, press ‘OK’ to confirm and back to Video. Press ‘RETURN’ button back to last Menu without any changes.
	<b>Camera</b>	In camera mode, press ‘UP/Down’ choose the needed camera (4), press ‘OK’ to confirm to next Sub-menu. In camera Sub-menu, press ‘OK’ to pair; after pairing showing video or pairing fail. Press ‘RETURN’ button back to last Menu without any changes.
	<b>TEMP</b>	Press ‘UP/Down’ to choose Temperature unit between °C/°F, press ‘OK’ to confirm and back to last Menu. Press ‘UP/Down’ to choose Temperature setting, to set the temperature to detect in the baby's room, press ‘OK’ press OK to change the max / min temperature Press ‘RETURN’ button back to last Menu without any changes.
	<b>Time</b>	Press ‘UP/Down’ to setup H/M, Press ‘OK’ to shift ‘H/M’, Press ‘RETURN’ button to confirm and back to last Menu.
	<b>Date</b>	Press ‘UP/Down’ to setup Y/M/D, Press ‘OK’ to shift ‘Y/M/D’, Press ‘RETURN’ button to confirm and back to last Menu.
	<b>Default</b>	Enter this menu and select “yes”, all settings restore to factory settings.
	<b>Setting</b>	

## 6. FCC and IC Regulations

**FCC Part 15:** This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Warning:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.
- To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product.

This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of the user’s body other than the hands are maintained at a distance of approximately 20 cm (8 inches) or more.

#### Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm (8 in.) between the radiator & your body.

#### Industry Canada

This Class B digital apparatus complies with Canadian ICES-003.

#### IC WARNING:

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.  
Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that , the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

## 5. Troubleshooting

#### No video display on screen

- Are the Monitor and Camera plugged in to a working electrical outlet?
  - Make certain any light switches that control power to the wall outlet are ON.
  - Check for pinched power cords.
- Are the Monitor and Camera turned ON?
  - To turn Monitor ON.
  - To connect the camera into the wall plug
- Is the Monitor in sleep mode?
  - Press the Video ON/OFF key to turn the display ON.

#### Monitor lost signal, “Out of Range”

- If there is no connection, the words “Out of Range” will be shown on the video display.
- Make certain that the Camera is turned ON, the green LED Power On indicator should be lit.
- The Monitor may be too far away from the Camera, bring the Monitor closer to the Camera.
- The Camera could have lost its connection to the Monitor. Pair the units by following the “Pair” a Camera instructions.

#### RF Radiation Exposure & Hazard Statement:

To ensure compliance with RSS-102 RF exposure requirements, this device must be installed in a location such that the antenna of the device will be greater than 20 cm (8 in.) away from all persons.

## 7. Cleaning and Care

To clean your Video Monitor, disconnect all cables and turn OFF. Use a soft, lint-free cloth. Avoid getting moisture in openings. Maintain your Video Monitor away from direct sunlight, hot or humid areas. Do not let product get wet.